

Standard accessories



The PT568, as standard will come with the following accessories:-



KTC-50A1(UK)
Switching power



KBC-70Q
Desktop charger



KB-56B
Li-poly 1500mAh
Battery pack



Antenna



KGS-01
Hand strap



KBJ-09
Belt Clip

Optional Accessories:



KB-56A
1200mAh NiMH
spare battery pack



KPT-10
Leather carry case



KBC-06A4
6 way fast charger
with UK PSU



KBC58M
In-Car battery
eliminator



RED1D01B-M1
1 wire D shell kit
with inline PTT/Mic



RED1E01B-M1
1 wire Earhanger kit
with inline PTT/Mic



RED1H01B-M1
1 wire Ear Shell kit
with in-line PTT/Mic



RED1W01B-M1
1 wire Eartube kit
with inline PTT/Mic



REDSM01B-M1
Lapel Speaker/Mic



RED1G01B-M1
1 wire G Shell kit
with inline PTT/Mic



REDHS01B-M1
1 sided Headset
& inline PTT



REDHS02B-M1
Heavy duty H/set
with inline PTT



REDMC01B-M1
Open Face bike kit
with boom mic



REDMC02B-M1
Full face bike kit




RED2W01B-M1
HD 2 wire covert kit
with ear-tube



RED2D01B-M1
HD 2 wire comms kit
with D shell

PT568



SPECIFICATIONS

General

Frequency Range	136~174MHz 400~450MHz 420~470MHz
Channel Capacity	16
Channel Spacing	12.5KHz/25KHz
Operating temperature	-30°C ~ +60°C
Antenna Impedance	50 Ω
Dimension(H×W×D)	111mm×52.5mm×33.5mm
Weight	270g
Battery	Li-poly 1500mAh


Transmitter

RF Power	4W/1W(UHF) 5W/1W(VHF)
Radiated Spurious Emission	-36dBm < 1GHz /-30dBm > 1GHz
FM Noise	-35dB@ 12.5KHz, -40dB@25KHz
Rated Audio Distortion	5%
Frequency Stability	2.5ppm
Modulation Limiting	±2.5KHz@ 12.5KHz, ±5KHz@25KHz

Receiver

Reference Sensitivity	0.28 μV@ 12.5KHz 0.25 μV@25KHz typical
Adjacent channel Selectivity	60dB @ 12.5KHz 70dB @ 20/25KHz
Intermodulation Rejection	65 dB
Rated Audio Power	1W

NOTICE: The specifications may be subject to change without notice due to advancement in technology, for more detailed information, please contact KIRISUN Electronics [Shenzhen] Co., Ltd.



For more information, please contact:



FC CE


KIRISUN ELECTRONICS (SHENZHEN) CO., LTD.

www.kirisun.com

www.kirisun.uk.com

PT568

Professional VHF/UHF Portable Radio

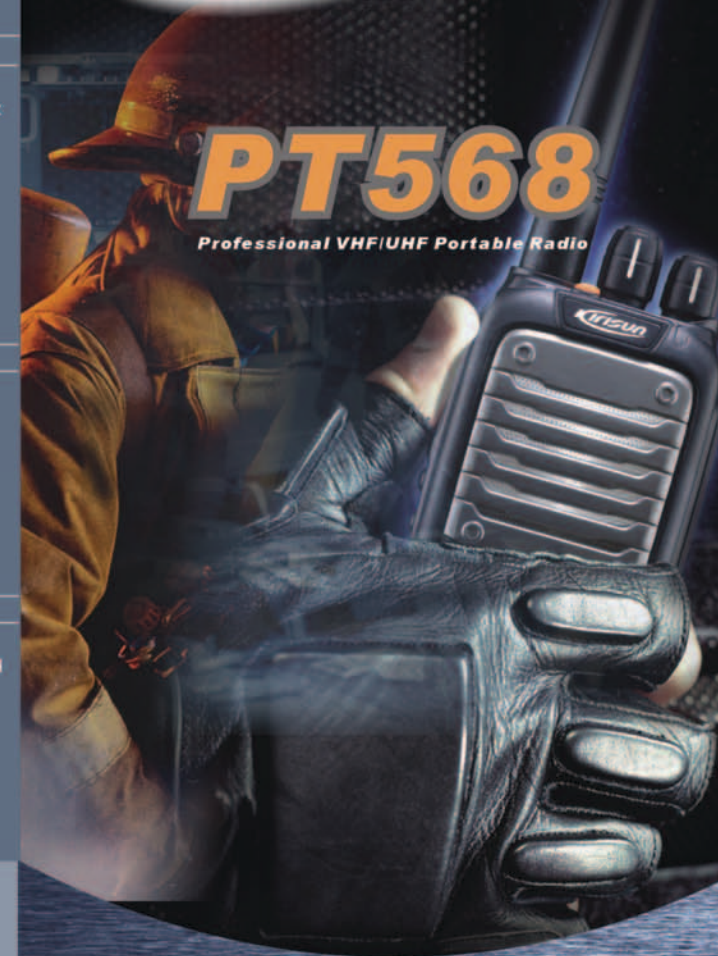

- CTCSS/DCS
- Patented battery locker
- Tail Tone Elimination
- High capacity Li-Ion Battery (1500mAh)
- 1000mw Audio Output Power
- Water Protection Class IP65
- Compact Size
- Free Channel Scan (FCS)